

Decorative Panel Radiator





Sale 20% Off

Decorative Panel Radiator (Horizontal pattern)

Model	White	Aluminium	Colours	Output	
				Watts	BTU
DH 36-80	€ 515	€ 567	€ 618	716	2442
DH 36-120	€ 618	€ 681	€ 744	1074	3662
DH 36-150	€ 698	€ 767	€ 837	1342	4576
DH 44-80	€ 561	€ 618	€ 674	821	2800
DH 44-120	€ 681	€ 749	€ 817	1231	4198
DH 51-60	€ 543	€ 598	€ 652	695	2370
DH 51-80	€ 611	€ 674	€ 734	926	3158
DH 51-100	€ 675	€ 744	€ 812	1158	3949
DH 51-120	€ 742	€ 817	€ 891	1390	4740
DH 51-150	€ 841	€ 926	€ 1,010	1737	5923
DH 59-80	€ 659	€ 725	€ 791	1036	3533
DH 59-120	€ 806	€ 887	€ 968	1555	5303
DH 59-150	€ 915	€ 1,007	€ 1,099	1943	6626

Decorative Panel Radiator (Vertical pattern)

Model	White	Aluminium	Colours	Output	
				Watts	BTU
DVL 80-29	€ 505	€ 557	€ 606	445	1517
DVL 80-44	€ 622	€ 685	€ 748	668	2278
DVL 120-29	€ 587	€ 646	€ 705	613	2090
DVL 120-44	€ 734	€ 808	€ 882	920	3137
DVL 150-29	€ 656	€ 721	€ 788	737	2316
DVL 150-36	€ 732	€ 806	€ 880	922	3154
DVL 150-44	€ 808	€ 889	€ 970	1106	3475
DVL 150-51	€ 878	€ 966	€ 1,054	1290	4053
DVL 180-29	€ 707	€ 778	€ 848	862	2939
DVL 180-36	€ 790	€ 869	€ 947	1077	3673
DVL 180-44	€ 863	€ 950	€ 1,036	1292	4406
DVL 180-51	€ 943	€ 1,038	€ 1,131	1508	5142

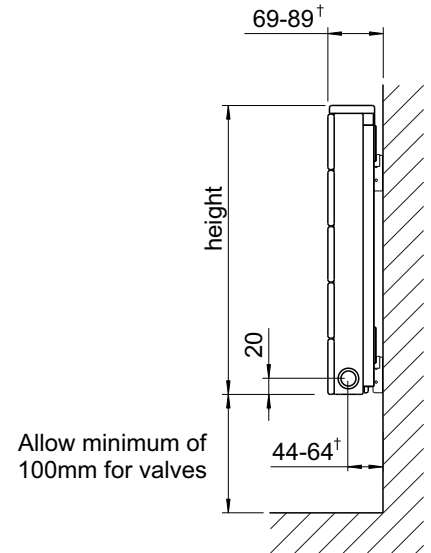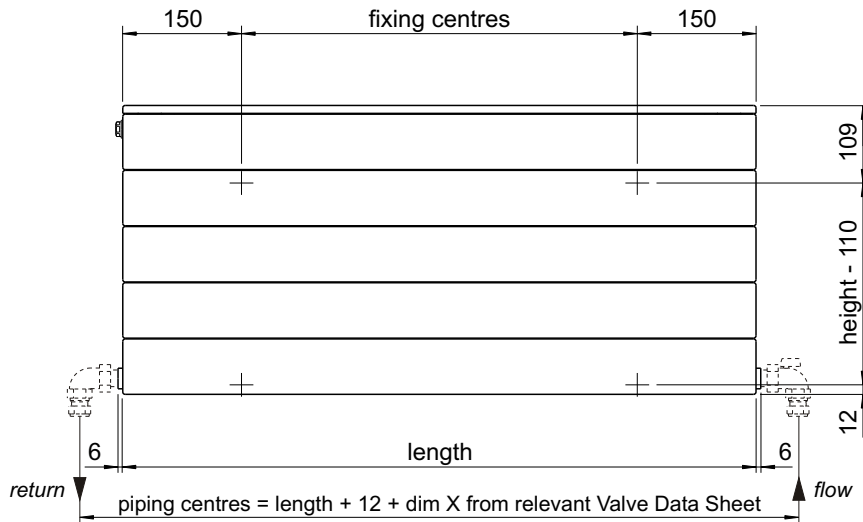

† Dimensions vary according to bracket position.
(See fitting instructions)

All dimensions shown are in millimetres



Test pressure: **6 BAR**
 Max working pressure: **4.6 BAR**
 Max working temperature: **120° C**
 All steel construction: **1.7mm header thickness**
 1.5mm panel thickness
 Connections: **½ inch BSP opposite end tapings**

Heat output determined in accordance with EN 442

Manufactured for Bisque by Zehnder of Switzerland

Model	Output ΔT=50K Watts	Output ΔT=60K Watts	n	Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Centres ± 5mm
DH 36-80	551	695	1.27	1.8	14	365	800	n/a	500
DH 36-120	826	1042	1.27	2.7	21	365	1200	n/a	900
DH 36-150	1033	1302	1.27	3.3	26	365	1500	n/a	1200
DH 44-80	631	796	1.27	2.1	17	436	800	n/a	500
DH 44-120	948	1194	1.27	3.2	25	436	1200	n/a	900
DH 51-60	534	674	1.28	1.9	15	507	600	n/a	300
DH 51-80	712	898	1.28	2.5	20	507	800	n/a	500
DH 51-100	889	1123	1.28	3.1	25	507	1000	n/a	700
DH 51-120	1067	1348	1.28	3.7	30	507	1200	n/a	900
DH 51-150	1335	1685	1.28	4.7	37	507	1500	n/a	1200
DH 59-80	794	1005	1.29	2.8	22	578	800	n/a	500
DH 59-120	1192	1508	1.29	4.2	34	578	1200	n/a	900
DH 59-150	1490	1885	1.29	5.3	42	578	1500	n/a	1200

VERTICAL PATTERN

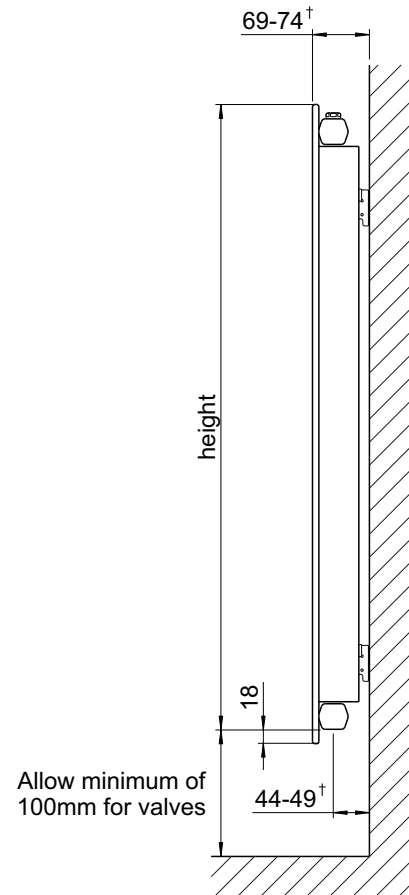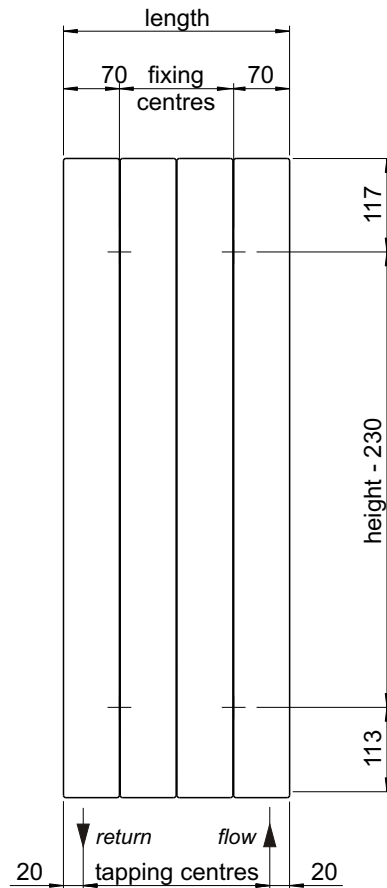

All dimensions shown are in millimetres

- Test pressure: **6 BAR**
- Max working pressure: **4.6 BAR**
- Max working temperature: **120° C**
- All steel construction: **1.7mm header thickness**
1.5mm panel thickness
- Connections: **½ inch BSP underside tappings**

Heat output determined in accordance with EN 442

Manufactured for Bisque by Zehnder of Switzerland

† Dimensions vary according to bracket position. (See fitting instructions)

Model	Output* ΔT=50K Watts	Output* ΔT=60K Watts	n	Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Centres ± 5mm
DVL 80-29	352	445	1.29	1.5	8	800	283	243	143
DVL 80-44	528	668	1.29	2.3	12	800	425	385	285
DVL 120-29	484	613	1.30	2.0	13	1200	283	243	143
DVL 120-44	726	920	1.30	3.1	19	1200	425	385	285
DVL 150-29	580	737	1.31	2.5	16	1500	283	243	143
DVL 150-36	725	922	1.31	3.1	20	1500	354	314	214
DVL 150-44	870	1106	1.31	3.7	24	1500	425	385	285
DVL 150-51	1015	1290	1.31	4.3	28	1500	496	456	356
DVL 180-29	676	862	1.33	2.8	20	1800	283	243	143
DVL 180-36	845	1077	1.33	3.6	25	1800	354	314	214
DVL 180-44	1014	1292	1.33	4.3	30	1800	425	385	285
DVL 180-51	1183	1508	1.33	5.0	35	1800	496	456	356